

HT35G



HEROTE



Fully Hydraulic System With Rubber Tracks

MINI EXCAVATOR

PRODUCT HIGHLIGHTS

- Equipped with an imported Yanmar engine, fuel-efficient, powerful, and highly effective.
- Matched with an imported hydraulic system, it offers high efficiency and fast response.
- Rubber tracks do not damage the road surface.
- Tailless design is suitable for narrow working conditions.
- Side-swing arm design allows for more flexible construction.

Overall Weight | 3600kg
Bucket Capacity | 0.12m³
Rated Power | 18.2kW



山东帝盟重工机械有限公司

SHANDONG DIAMOND HEAVY INDUSTRY CO.,LTD

Telephone: 400-106-1996

International Trade: 86-534-7452888

E-mail: dm@sddmzg.com

Website: www.sddmzg.com

Address: National High-tech Industrial Development Zone, Yucheng City,
Dezhou City, Shandong Province, China.



HT35G



HEINSTE



Fully Hydraulic System With Rubber Tracks

MINI EXCAVATOR

Technical Parameters

HT35G

Engine

| | |
|-------------|---------------------|
| Engine Type | Yanmar 3TNV88F-ESSY |
| Power | 18.2kW/2200rpm |

Working Range


| | |
|----------------------|--------|
| Max.Digging Radius | 5465mm |
| Max.Unloading Height | 3460mm |

Weight

| | |
|----------------|--------|
| Overall Weight | 3600kg |
|----------------|--------|

Bucket


| | |
|-----------------|--------------------|
| Bucket Capacity | 0.12m ³ |
|-----------------|--------------------|

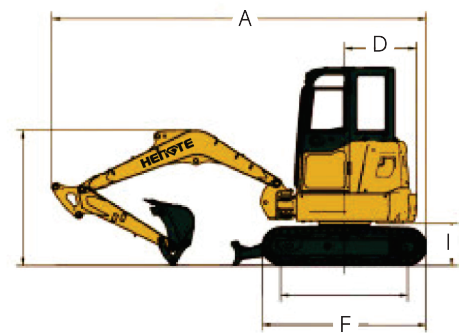

Overall Dimension

HT35G

| Describe | Unit | Value |
|---------------------------------------|------|-------|
| A. Shipping Length | mm | 4920 |
| B. Total Height During Transportation | mm | 2550 |
| C. Overall Width | mm | 1720 |
| D. Tail Turning Radius | mm | 860 |
| E. Turntable Width | mm | 1550 |
| F. Track Length | mm | 2155 |
| G. Track Gauge | mm | 1420 |
| H. Track Width | mm | 300 |
| I. Ground Clearance of Counterweight | mm | 590 |
| J. Minimum Ground Clearance | mm | 295 |



Working Range and Digging Force

HT35G

| Describe | Unit | Value |
|--------------------------------|----------------|---------|
| a. Maximum Digging Radius | mm | 5465 |
| b. Maximum Digging Height | mm | 4855 |
| c. Maximum Digging Depth | mm | 3105 |
| d. Maximum Unloading Height | mm | 3460 |
| e. Hydraulic System Pressure | MPa | 24.5 |
| f. Hydraulic System Flow Rate | L/min | 88 |
| g. Fuel Tank Capacity | L | 50 |
| h. Hydraulic Oil Tank Capacity | L | 40 |
| i. Bucket Digging Force | kN | 30.5 |
| j. Stick Digging Force | kN | 18.5 |
| k. Fuel Tank Capacity | m ³ | 0.12 |
| l. Travel Speed | km/h | 2.4/4.4 |

